

1. THE STRUCTURE SHOWN ON THESE DRAWING IS SOUND ONLY IN ITS COMPLETED FORM. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING THE DESIGN, ADEQUACY, SAFETY AND STABILITY OF TEMPORARY ERECTION BRACING AND SHORING.

- ## EXISTING CONSTRUCTION NOTES

1. **GENERAL BUILDING CODE** - THE CONSTRUCTION DOCUMENTS ARE BASED ON THE REQUIREMENTS OF THE 2020 BUILDING CODE OF NEW YORK STATE.

- WIND DESIGN DATA** - WIND PRESSURES ARE BASED ON CHAPTER 26 OF THE AMERICAN SOCIETY OF CIVIL ENGINEERS, MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES, ASCE 7 AND THE FOLLOWING CRITERIA:
- | | |
|--|-------------------------|
| A. BASIC DESIGN WIND SPEED (V): | 120 MPH |
| B. ALLOWABLE STRESS DESIGN WIND SPEED (V _{asd}): | 93 MPH |
| C. RISK CATEGORY: | III |
| D. WIND EXPOSURE: | B |
| E. INTERNAL PRESSURE COEFFICIENT (GC _{pi}): | + 0.18/- 0.18 |
| F. COMPONENTS AND CLADDING: | +/- 32 PSF (10 SF AREA) |

- | EARTHQUAKE DESIGN DATA - THE STRUCTURE AND COMPONENTS OF THE BUILDING HAVE BEEN DESIGNED IN ACCORDANCE WITH THE PREVIOUSLY MENTIONED CODE WITH THE FOLLOWING CRITERIA: | |
|--|---|
| A. RISK CATEGORY: | III |
| B. SEISMIC IMPORTANCE FACTOR (I _{pe}): | 1.25 |
| C. 0.2 SEC MAPPED SPECTRAL RESPONSE (S _{pe}): | 0.257 g |
| D. 1 SEC MAPPED SPECTRAL RESPONSE (S ₁): | 0.058 g |
| E. SITE CLASS: | D (ASSUMED) |
| F. 0.2 SEC SPECTRAL RESPONSE COEF. (S _{pe}): | 0.273 g |
| G. 1 SEC SPECTRAL RESPONSE COEF. (S ₁): | 0.093 g |
| H. SEISMIC DESIGN CATEGORY: | B |
| I. BASIC SEISMIC FORCE-RESISTING SYSTEMS: | N/A |
| J. DESIGN BASE SHEARS: | N/A |
| K. SEISMIC MODIFICATION COEF. (C _s): | 0.0775 |
| L. RESPONSE MODIFICATION COEF. (R): | 2.5 |
| M. ANALYSIS PROCEDURE USED: | EQUIVALENT LATERAL FORCE PROCEDURE (ELFP) |

4. **GEOTECHNICAL INFORMATION** - THE STRUCTURE HAS BEEN DESIGNED BASED ON THE FOLLOWING CRITERIA:
- | | | |
|----|--------------------|---------------------|
| A. | ALLOWABLE BEARING: | 2,000 PSF (ASSUMED) |
| B. | SUBGRADE MODULUS: | 100 PCI (ASSUMED) |

5. **ROOF RAIN LOAD DATA** - THE DESIGN RAINFALL BASED ON THE 100-YEAR HOURLY RAINFALL RATE OR DETERMINED BY LOCAL WEATHER USED IN THE DESIGN OF THE BUILDING IS BASED ON THE FOLLOWING:

- A. RAIN INTENSITY (i): 2.82 IN/HR
5. SEISMIC DEMANDS ON NON-STRUCTURAL COMPONENTS, AND CONNECTIONS OF THOSE COMPONENTS TO THE PRIMARY STRUCTURE SHALL BE DESIGNED IN ACCORDANCE WITH THE PREVIOUSLY MENTIONED CODE, THE GENERAL SEISMIC CRITERIA LISTED ABOVE, AND THE REQUIREMENTS OF ASCE 7, CHAPTER 13 AS APPROPRIATE.

7. **ROOF TOP EQUIPMENT ANCHORAGE** - NO PROPOSED ROOF TOP EQUIPMENT WILL BE INSTALLED IN THIS PROJECT.

GENERAL

1. ALL CONCRETE WORK, CONSTRUCTION AND REINFORCING DETAILS SHALL CONFORM TO THE AMERICAN CONCRETE INSTITUTE BUILDING CODE REQUIREMENTS" (ACI-318).

2. ALL CONCRETE SHALL ATTAIN A MINIMUM COMPRESSIVE STRENGTH OF 3,000 PSI AT 28 DAYS AND CONFORM TO THE REQUIREMENTS OF THE SCHEDULE BELOW, UNLESS NOTED OTHERWISE. SEE SPECIFICATIONS FOR MIX DESIGN REQUIREMENTS.

LOCATION	W/C RATIO	SLUMP (±1")	% AIR (±1%)	MAXIMUM AGGREGATE	MIN. STRENGTH @ 28 DAYS
SLAB ON GRADE (INT.)	.45	3.5"	4	3/4"	3,000 PSI
SLAB ON GRADE (EXT.)	.45	3.5"	5.5	3/4"	5,000 PSI


- ## REINFORCING STEEL

- ### SLABS-ON-GRADE

- ALL SLABS ON GRADE SHALL BE PLACED OVER A STEGO 10-MIL VAPOR BARRIER. TAPE ALL SEAMS AND PROVIDE FLASHING/BOOTS AROUND PIPE PENETRATIONS.
- UNDER SLABS ON GRADE: 6-INCH LIFT OF "CRUSHED STONE" MATERIAL CONFORMING TO SUBBASE STONE.
- SLAB-ON-GRADE REINFORCEMENT SHALL BE 6x6-W2.9x2.9 WWF, UNLESS NOTED OTHERWISE.
- PLACEMENT OF WELDED WIRE REINFORCEMENT SHALL BE AT A CONSISTENT DEPTH OF 1 1/2" FROM TOP OF SLAB, AND SHALL BE PROPERLY CHAINED.
- WET CURE FOR 7 DAYS BEFORE APPLYING ANY WHEELED TRAFFIC OR MASONRY PARTITIONS.
- CONCRETE SLAB CONTROL JOINTS SHALL BE CUT INTO THE SLABS AT A DEPTH OF 1/4 TIMES THE SLAB THICKNESS WITHIN 12 HOURS OF PLACING THE CONCRETE. MAXIMUM SPACING OF INTERIOR SLAB CONTROL JOINTS, UNLESS NOTED OTHERWISE, SHALL BE 15'-0" O/C IN EACH DIRECTION. JOINTS SHALL TYPICALLY RUN BETWEEN COLUMNS AND TERMINATE AT A COLUMN ISOLATION POUR. THE LENGTH OF ANY INDIVIDUAL JOINTED AREA SHALL NOT EXCEED 1.5 TIMES ITS WIDTH.
- CONSTRUCTION/COLD JOINTS: TERMINATE DAY'S CONCRETE WORK AT A CONTROL JOINT LOCATION. PROVIDE A KEYWAY OR DOWELS FOR CONTINUATION OF WORK WITH NEXT POUR. CONTINUE 50% OF SLAB REINFORCEMENT THROUGHOUT CONSTRUCTION AND CONTRACTION JOINTS.
- CONCRETE SURFACE SHALL BE HARD STEEL TROWEL FINISH.
- REFER TO ARCHITECTURAL, MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS FOR SLAB FINISHES, SLAB DEPRESSIONS, THICKENED SLABS, EQUIPMENT PADS/CURBS, ELEVATIONS, AND ENCASED OR EMBEDDED ITEMS.
- PLUMBING AND ELECTRICAL CONDUITS SHALL BE PLACED BELOW THE SLAB AND NOT WITHIN THE SLAB. VERTICAL PENETRATIONS ARE ALLOWED.
- PROVIDE ONE #4 BAR, 4'-0" LONG, DIAGONAL AT CORNERS AND OPENINGS IN SLABS-ON-GRADE.


CRUCIAL NOTES:

1. PROVIDE LISTS OVER ALL MASONRY OPENINGS AS SCHEDULED UNLESS NOTED OTHERWISE ON THE DRAWINGS.
2. MINIMUM BEARING FOR ALL LISTS SHALL BE 8" EACH END.
3. GROUT SOLID AREA 16" W X 24" H BELOW BEARING UNLESS NOTED OTHERWISE ON THE DRAWINGS.
4. COORDINATE MASONRY OPENING SIZES AND LOCATIONS WITH ARCHITECTURAL, MECHANICAL, AND PLUMBING DRAWINGS.
5. CONTRACTOR SHALL PROVIDE AN ADDITIONAL 50 FEET OF L5x3-1/2x5/16 ANGLE FOR MASONRY OPENING SPANS GREATER THAN 6'-0". BOLT ASSEMBLIES TOGETHER AT 1/3 POINTS.
6. FOR ALL W AND W/ SHAPE LISTS, PROVIDE A 1/2x5/16 BEARING PLATE WITH (2) 1/2" DIAMETER BOLTS EACH END.
7. STEEL LISTS EXPOSED TO THE EXTERIOR SHALL BE GALVANIZED UNLESS NOTED OTHERWISE.

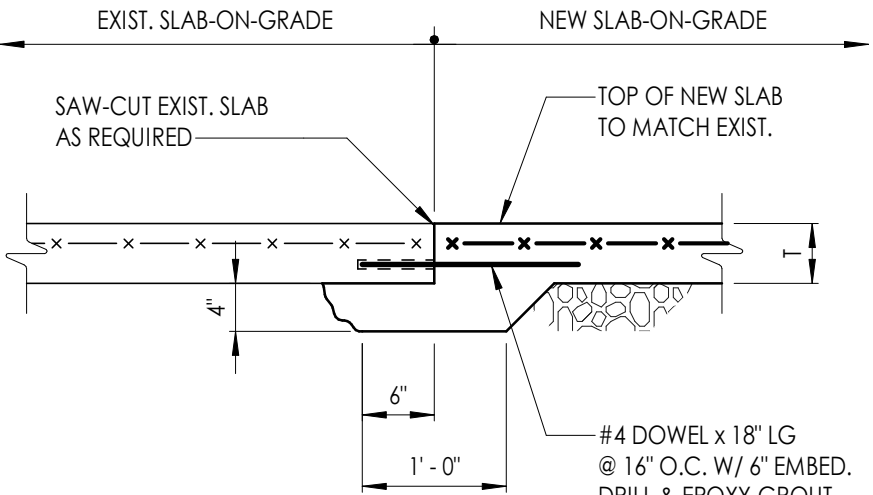

DETAIL NOTES:

1. REFER TO MECHANICAL AND PLUMBING DRAWINGS FOR UTILITY LOCATIONS.

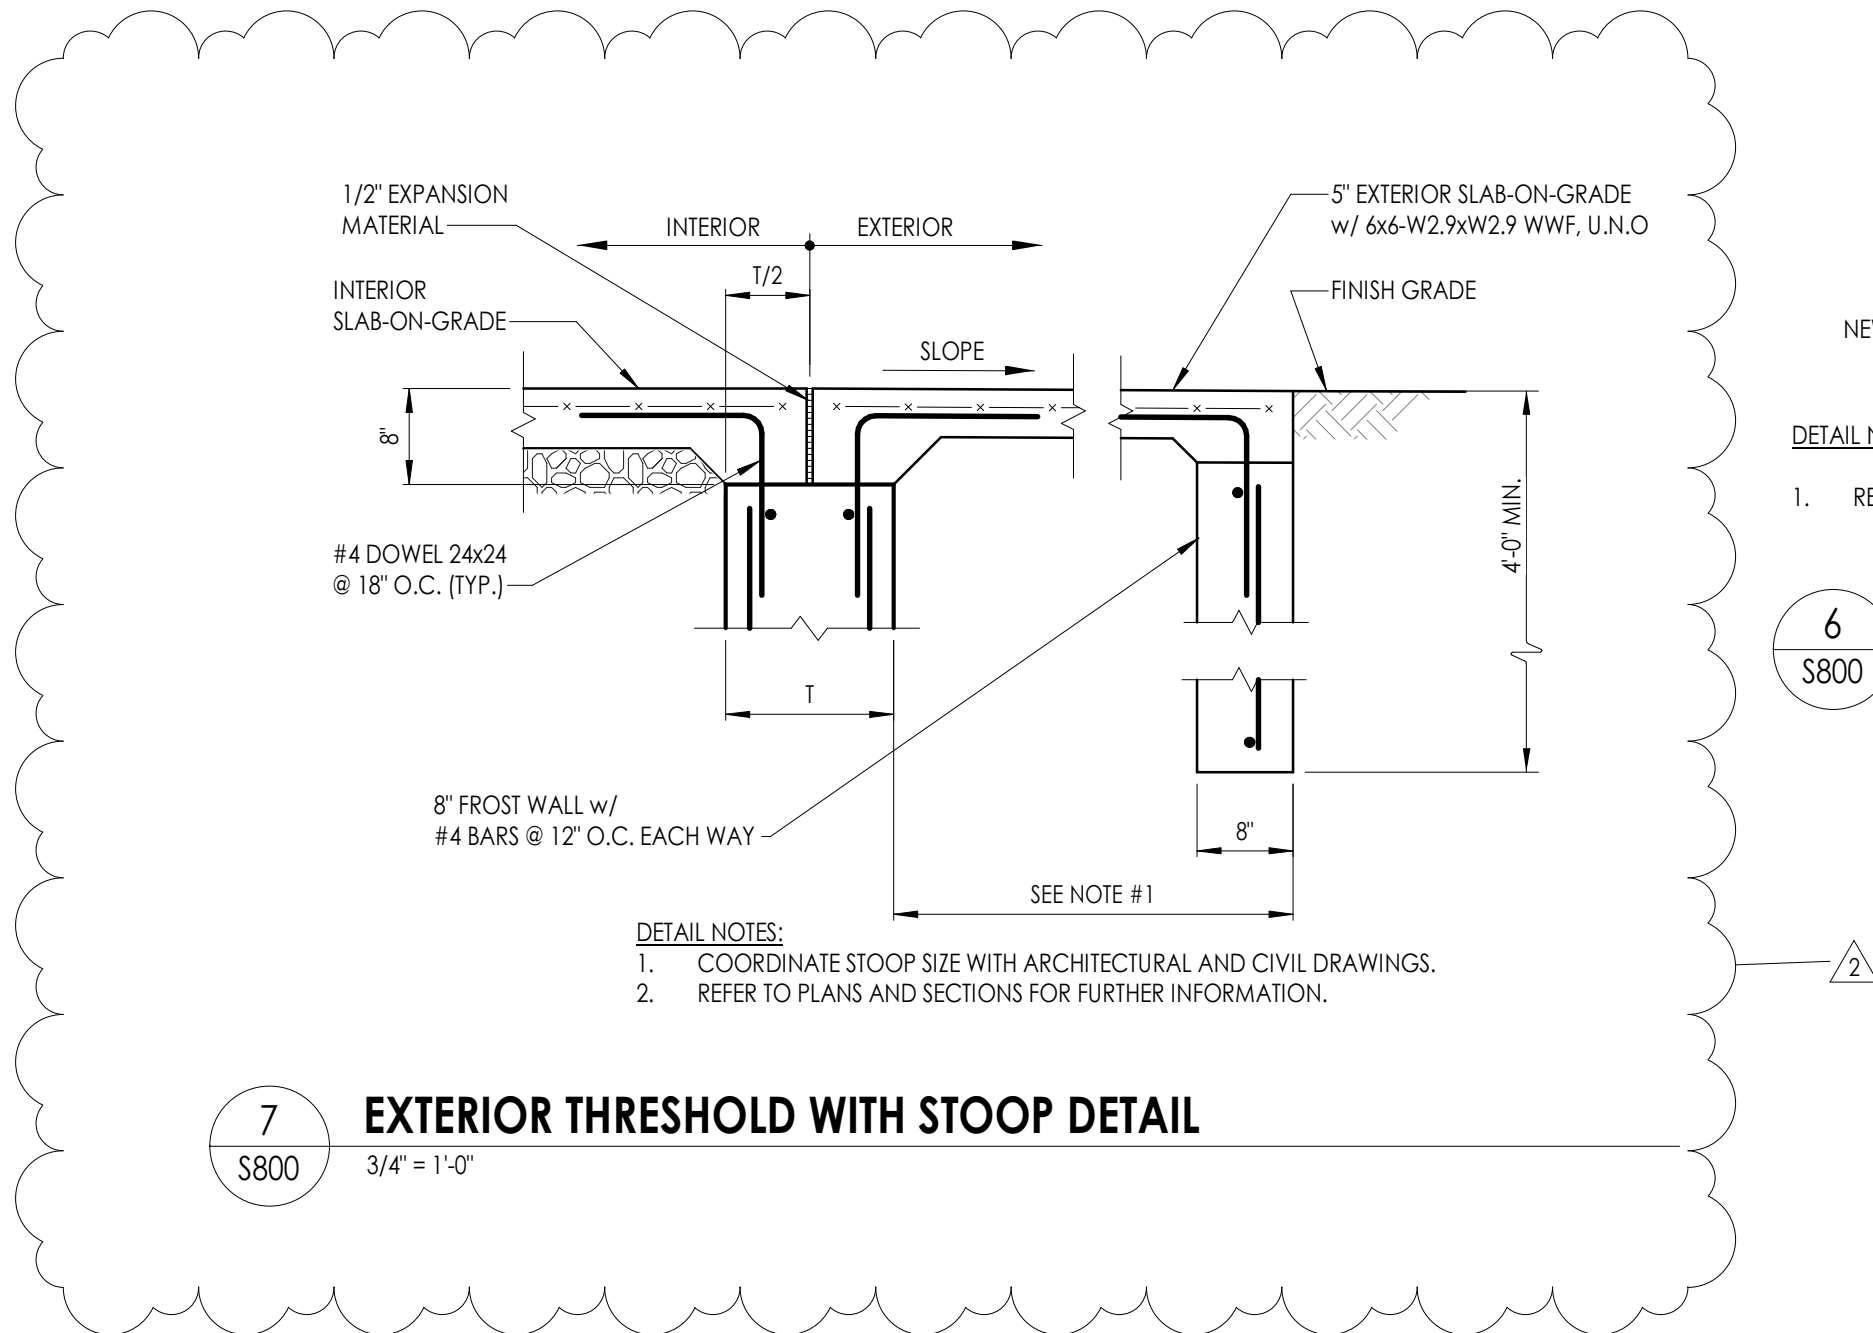

PROJECT ISSUE & REVISION SCHEDULE	
Date	Description
11/18/2024	BID ADDENDUM 02

PROFESSIONAL STAMPS


IS A VIOLATION OF THE NEW YORK STATE EDUCATION LAW AND THE COMMISSIONER'S REGULATIONS FOR ANY PERSON, UNLESS ACTING UNDER THE DIRECTION OF A LICENSED ARCHITECT, ENGINEER OR LAND SURVEYOR, TO ALTER AN ITEM IN ANY WAY, IF AN ITEM BEARING THE SEAL OF AN ARCHITECT, ENGINEER OR SURVEYOR IS ALTERED, THE ALTERING PARTY SHALL AFFIX TO THE ITEM THEIR SEAL AND THE NOTATION "ALTERED BY" FOLLOWED BY THEIR SIGNATURE AND THE DATE OF SUCH ALTERATION, AND A SPECIFIC DESCRIPTION OF THE ALTERATION.

SHEET INFORMATION


Issued	Scale
10/28/2024	As indicated
Project Status	
BID DOCUMENTS	
Drawn By	Checked By
N K C	L D W
Drawing Title	

Drawing Number


GEN
S800

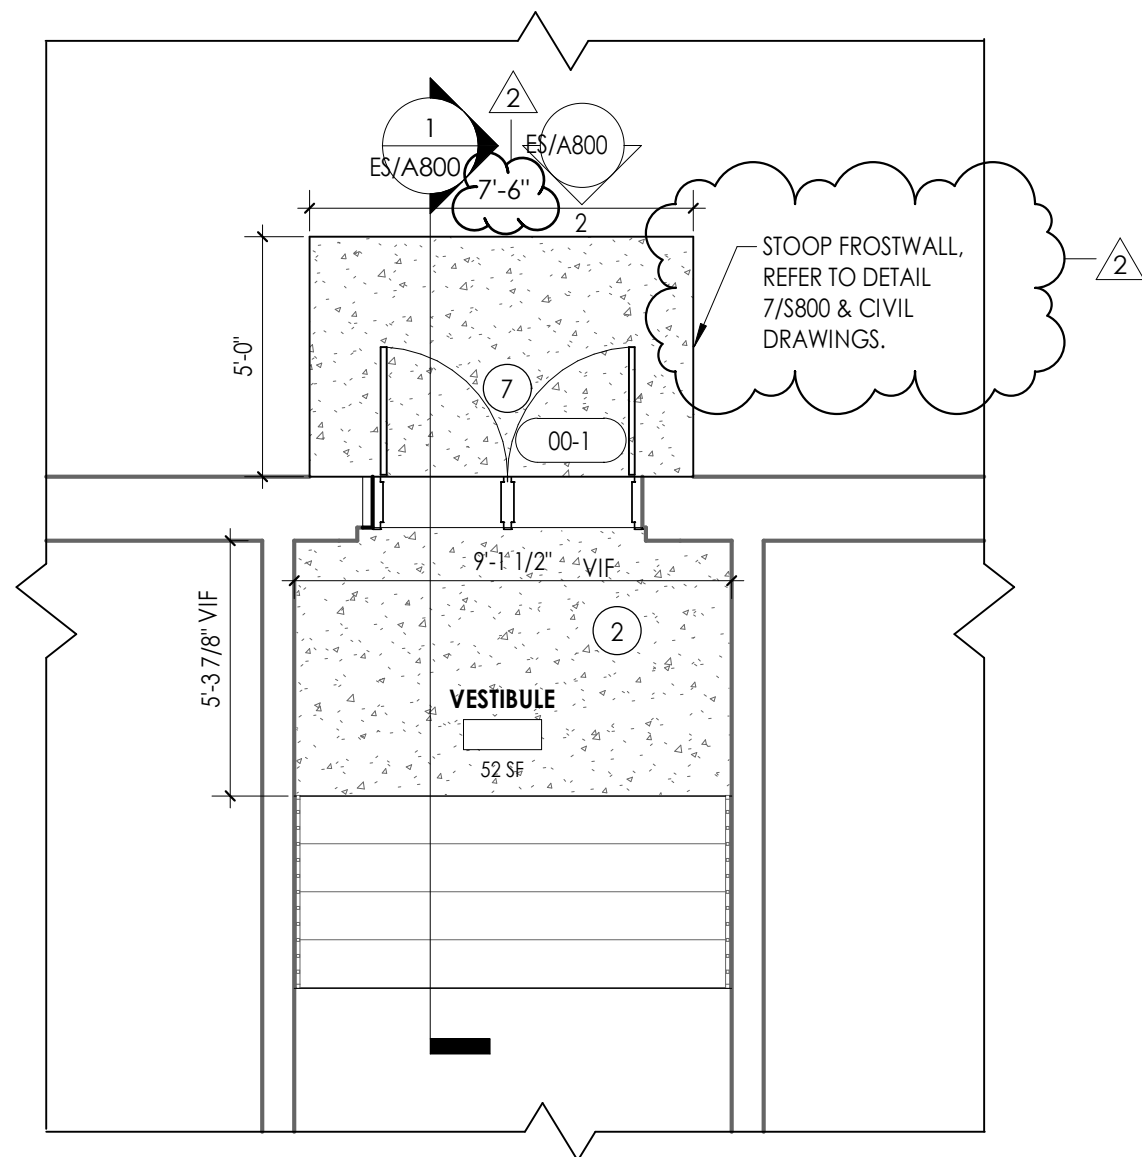


4 ENLARGED NEW WORK PLAN AREA A.5
A202 1/4" = 1'-0"

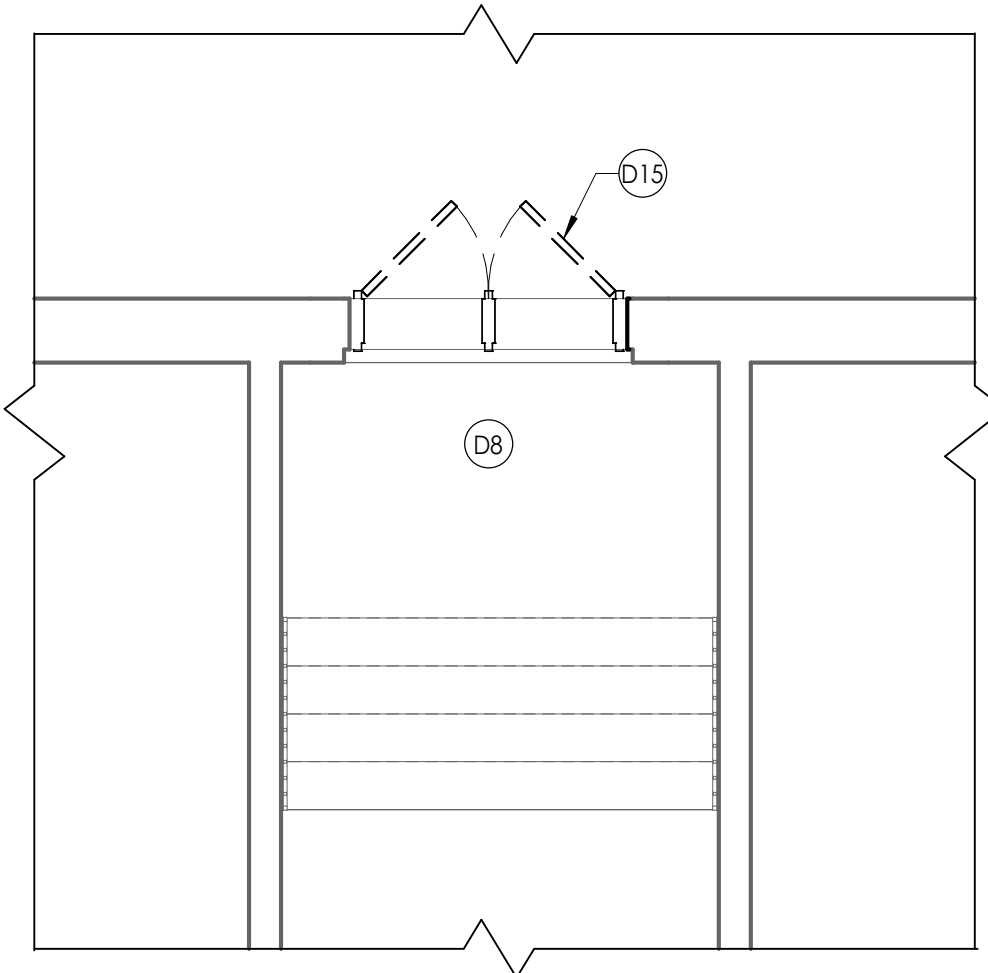

3 ENLARGED DEMOLITION AREA A.5
A202 1/4" = 1'-0"

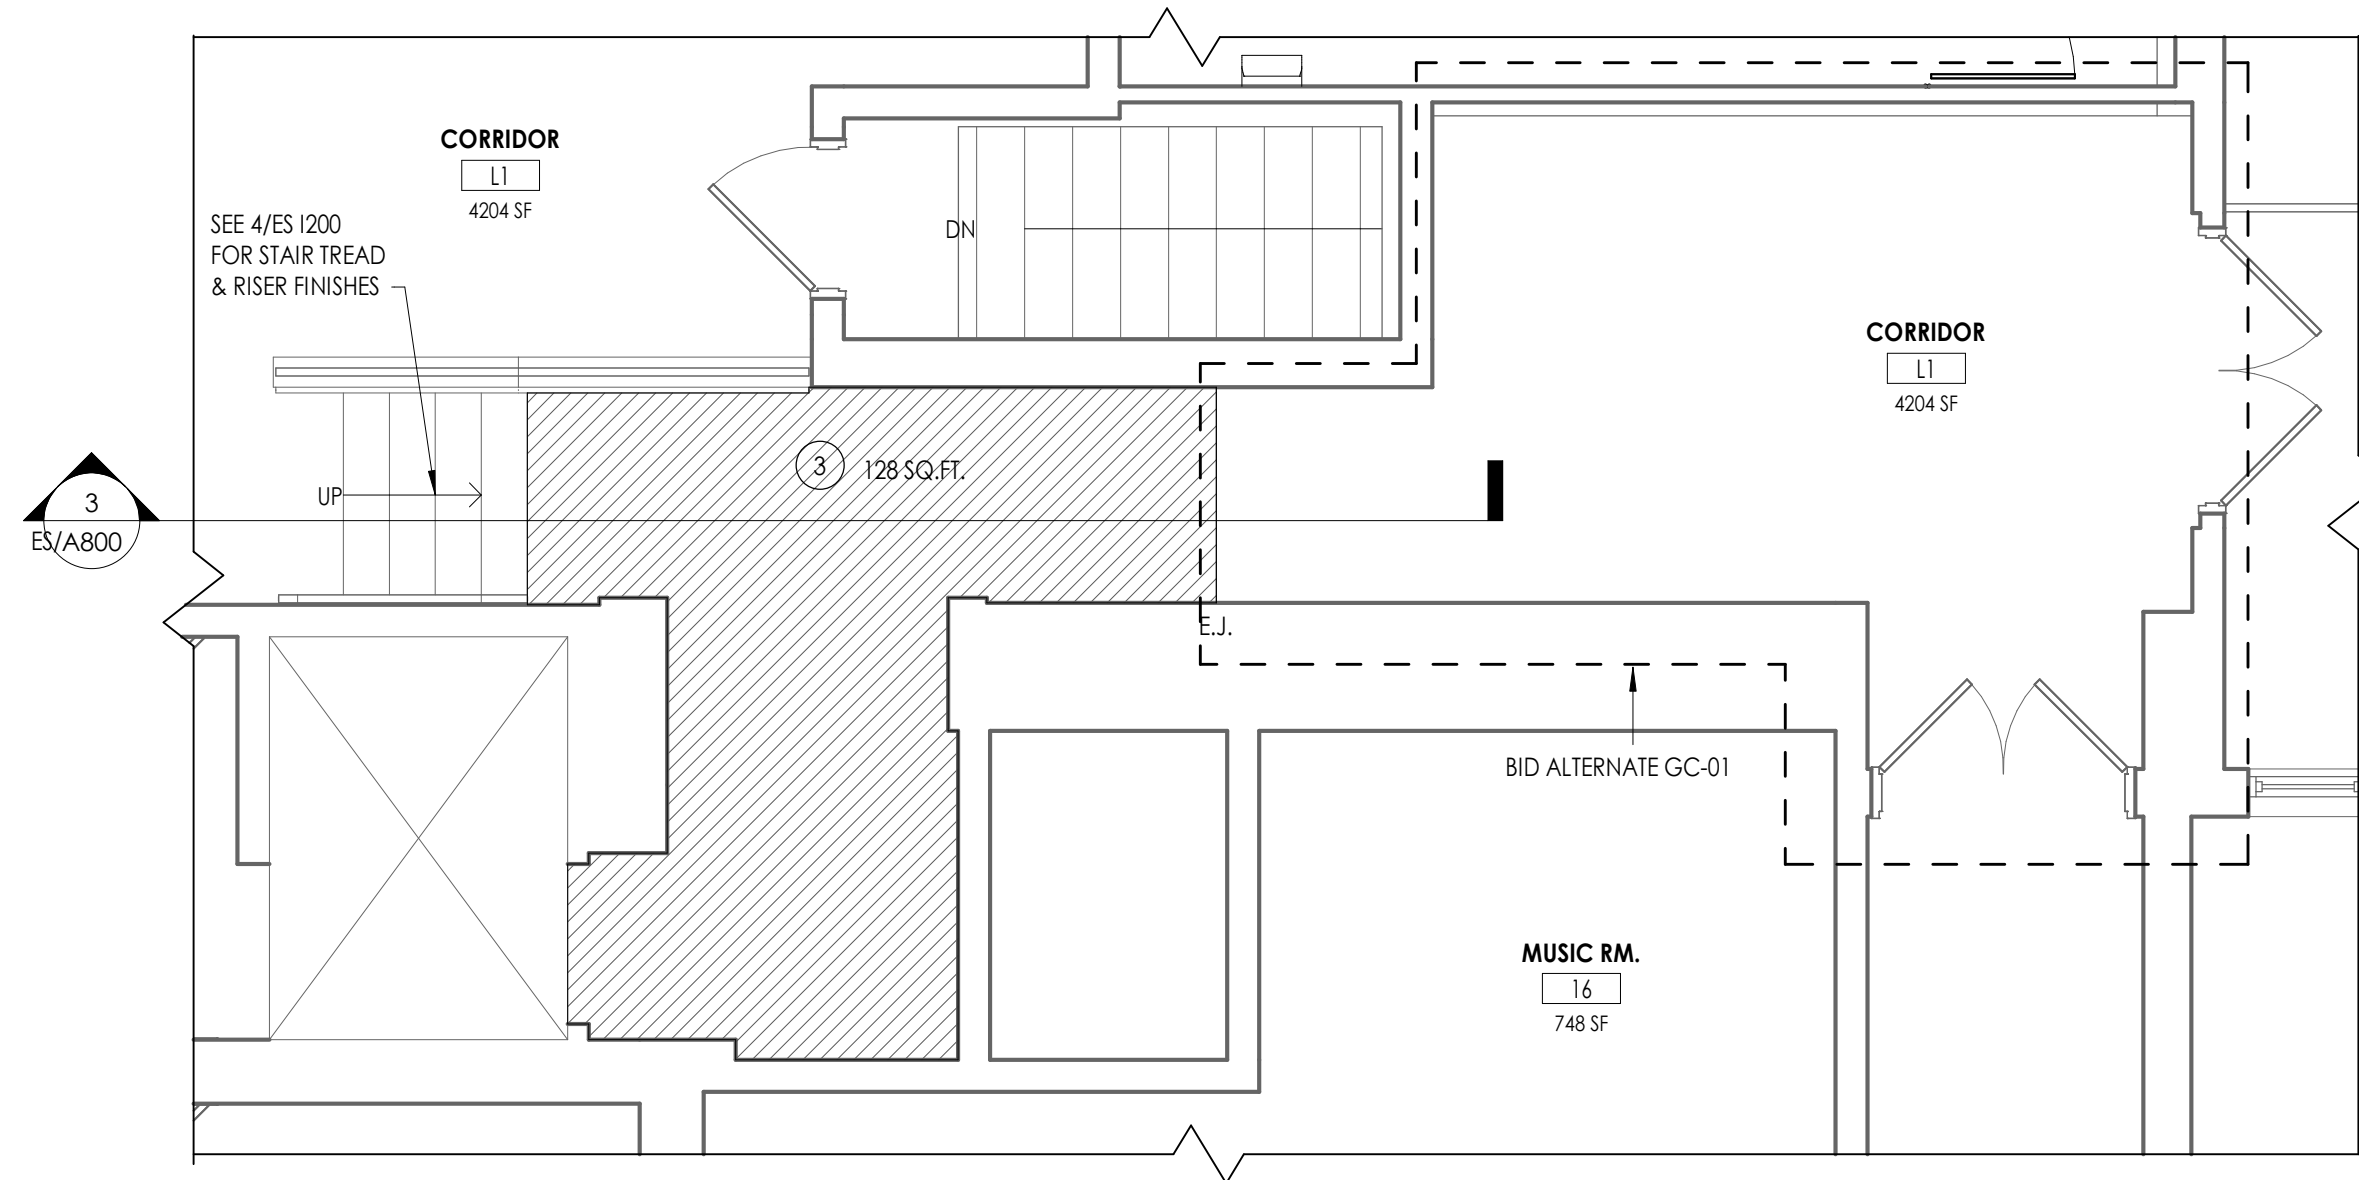

2 ENLARGED NEW WORK AREA A.4
A202 1/4" = 1'-0"

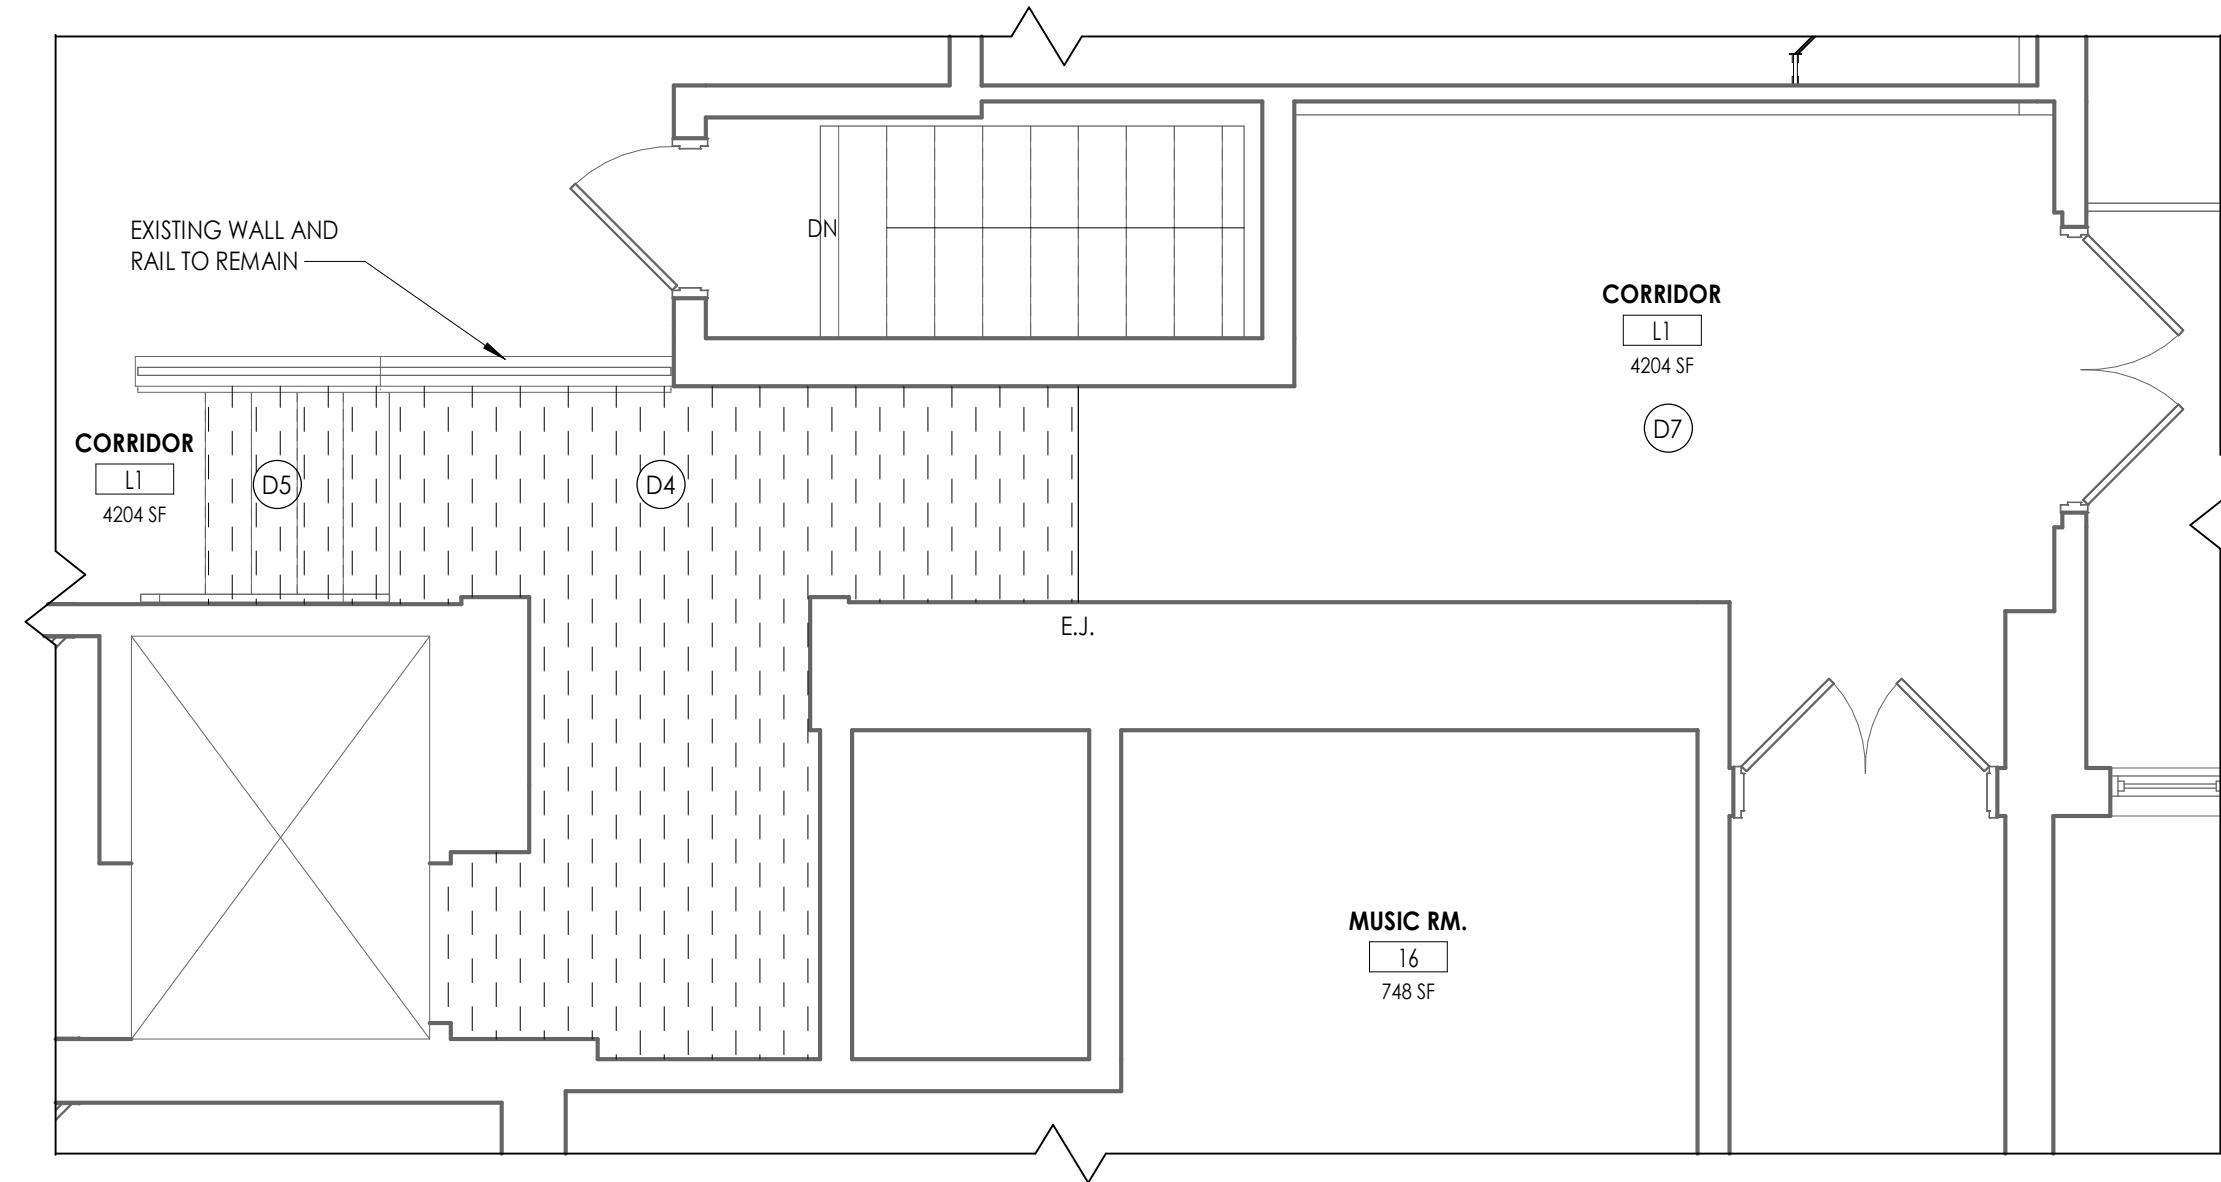

1 ENLARGED DEMOLITION AREA A.4
A202 1/4" = 1'-0"

NEW WORK KEY NOTES

- 1 INFILL CONCRETE SLAB TO MATCH EXISTING SLAB PER DETAIL 6/S800.
- 2 NEW CONCRETE SLAB PER SECTION DETAIL.
- 3 PROVIDE NEW JOISTS SISTERED TO EXISTING JOISTS AND NEW SUBFLOOR PER DETAIL.
- 4 PATCH FLOOR SLAB AT PIPE LOCATION
- 5 INFILL WALL OPENING WITH 2-1/2" METAL STUDS, THERMAL INSULATION AND MOISTURE RESISTANT GYPSUM WALL BOARD PREP FOR TILE FINISH.
- 6 PROVIDE 8" CMU INFILL. TOOTH NEW INTO EXISTING.
- 7 INSTALL SALVAGED FRP DOOR AND HARDWARE IN NEW ALUMINUM FRAME.
- 8 PROVIDE HANDICAP ACTUATOR AND PUSH BUTTON. COORDINATE WITH EC.
- 9 PROVIDE FULL HEIGHT TOILET PARTITIONS.
- 10 PROVIDE DISPLAY CASE.
- 11 PROVIDE ADA BENCH.
- 12 PROVIDE/INSTALL TOILET ROOM ACCESSORIES PER ELEVATIONS. REFER TO GEN/A701
- 13 PC TO INSTALL NEW PLUMBING FIXTURE.
- 14 PROVIDE 4" CMU INFILL. TOOTH NEW INTO EXISTING.
- 15 NEW THRESHOLD. SEE INTERIOR FINISHED PLAN ES3/200
- 16 PROVIDE NEW OPAQUE SPANDREL PANEL G2 TYP. OF (6)

FLOOR PLAN GENERAL NOTES

1. ALL DRAWINGS ARE GRAPHIC REPRESENTATIONS OF APPROXIMATE LOCATIONS OF NEW MATERIALS. FIELD VERIFY ALL EXISTING CONDITIONS PRIOR TO COMMENCEMENT OF WORK.
2. ALL WALL DIMENSIONS INDICATED ON FLOOR PLANS ARE FROM FACE OF FINISH TO FACE OF FINISH UNLESS OTHERWISE NOTED.
3. SEE SHEET **A400** FOR INTERIOR PARTITION TYPES.
4. SEE **A900s** FOR INTERIOR AND EXTERIOR DOORS, WINDOWS, CURTAIN WALLS, AND STOREFRONTS.
5. WORK AREAS SHALL BE MAINTAINED AND ALL WORK AREAS SHALL BE LEFT BROOM CLEANED AT END OF EACH DAY.
6. COORDINATE WITH OTHER TRADES FOR SEQUENCING OF WORK.
7. REFER TO **A700** FOR TYPICAL FIXTURE MOUNTING HEIGHTS AND ACCESSORIES LEGEND.
8. REFER TO **A700** FOR FURNISH AND INSTALL SCOPE OF EQUIPMENT AND ACCESSORIES.
9. EQUIPMENT SHOWN ON THESE DOCUMENTS ARE FOR REFERENCE ONLY AND ARE FOR COORDINATION OF M.E.P. INFRASTRUCTURE TO OPERATE ITEMS INCLUDED UNDER THE SCOPE.
10. REFER TO OWNER FURNISHED EQUIPMENT DRAWINGS AND SUBMITTALS FOR FINAL COORDINATION AND INSTALLATION REQUIREMENTS INCLUDING BUT NOT LIMITED TO: DIMENSIONS, LOCATIONS & MEP CONNECTION LOCATION.
11. ALL FURNITURE IS PROVIDED BY OWNER UNLESS NOTED OTHERWISE.
12. PATCH AND FINISH ALL EXISTING WALLS TO REMAIN WITHIN THE PROJECT LIMIT AREA TO RECEIVE SPECIFIED FINISHES.
13. ALL EXISTING EXPANSION JOINT COVERS OR ASSEMBLIES ARE TO BE PROTECTED AND MAINTAINED DURING THE COURSE OF CONSTRUCTION UNLESS OTHERWISE NOTED.
14. PROVIDE CONCRETE FLOOR PATCH AND FLOOR LEVELING AT EXISTING CONCRETE FLOORS FOR NEW FINISHES.

FLOOR PLAN LEGEND

- 00-1 DOOR TARGET, SEE SCHEDULE
- 1 COLUMN LINE IDENTIFICATION
- ROOM NAME
H234.2
150 SF
10'-0" x 10'-0"
- ROOM TAG
- XXX DENOTES CHANGE IN FLOOR MATERIAL
- 1 SECTION MARK
A3.1
- 2 INTERIOR ELEVATION MARK
A701
- 3 EXTERIOR ELEVATION MARK
A301
- 1 DETAIL FOR REFERENCE MARK
A4.1
- BLOCKING IN WALLS FOR GRAB BAR INSTALLATION
- DENOTES FINISH FLOOR GRADE ELEVATION
- XXX WALL TYPE SEE A/400

DEMOLITION KEY NOTES

- D1 SAWCUT AND REMOVE EXISTING CONCRETE FLOOR AND TRENCH TO FASCILITATE UNDERGROUND PLUMBING WORK.
- D2 GRIDE EXISTING CONCRETE FLOOR DOWN TO PITCH TOWARD NEW DRAIN MIN. 1/8" PER FOOT.
- D3 REMOVE EXISTING MARBLE SADDLE.
- D4 REMOVE EXISTING SHEET VINYL FLOORING, WALL BASE, AND PLYWOOD SUBFLOOR TO ACCOMMODATE NEW WORK.
- D5 REMOVE RUBBER STAIR TREADS AND PREP FOR NEW STAIR TREADS.
- D6 REMOVE EXISTING CERAMIC FLOOR TILE, COVE BASE, MORTAR, GROUT, AND ADHESIVE DOWN TO CONCRETE SUBSTRATE.
- D7 PREP TERRAZZO FLOOR FINISH TO RECEIVE NEW FINISH AS PART OF ALTERNATE GC-01
- D8 PREP EXISTING TERRAZZO FLOOR FOR NEW CONCRETE SLAB.
- D9 REMOVE PORTION OF 4" CMU WALL TO ACCOMMODATE NEW WORK.
- D10 REMOVE PORTION OF 6" CMU WALL TO ACCOMMODATE NEW WORK.
- D11 REMOVE PORTION OF 8" CMU WALL TO ACCOMMODATE NEW WORK.
- D12 REMOVE PORTION OF 16" MASONRY WALL TO ACCOMMODATE NEW WORK.
- D13 REMOVE EXISTING TILE WALL FINISH INCLUDING MORTAT AND ADHESIVES DOWN TO SUBSTRATE. PREP FOR NEW FINISHES.
- D14 REMOVE EXISTING FRP WALL PANELS.



GENERAL NOTES

1. ALL DRAWINGS ARE GRAPHIC REPRESENTATION OF APPROXIMATE LOCATIONS OF MATERIALS TO BE REMOVED. IT IS THE CONTRACTORS RESPONSIBILITY TO FIELD VERIFY ALL EXISTING CONDITIONS & DIMENSIONS PRIOR TO COMMENCEMENT OF ALL DEMOLITION WORK.
2. REFER TO THE MECHANICAL, ELECTRICAL AND PLUMBING DRAWINGS FOR DEMOLITION OF EXISTING UTILITIES AND SERVICES.
3. ALL ITEMS TO BE SALVAGED WITHIN THE DEMOLITION AREA WILL BE REMOVED BY THE OWNER PRIOR TO ONSET OF DEMOLITION WORK.
4. REMAINING SUBSTRATES SHALL BE LEFT IN A CONDITION ACCEPTABLE TO RECEIVE NEW WORK. WHERE NEW FINISHES ARE SCHEDULED AT EXISTING CONDITIONS, REMOVE EXISTING FINISHES DOWN TO SUBSTRATE AND PREPARE SURFACE FOR NEW FINISH.
5. THE CONTRACTOR IS RESPONSIBLE FOR DAMAGE TO ANY EXISTING FINISHES AND EQUIPMENT NOT REMOVED UNDER THE SCOPE OF WORK. ANY DAMAGE WILL BE REPAIRED TO THE OWNER/ARCHITECT'S SATISFACTION. AT NOT ADDITIONAL COST TO THE OWNER.
6. POWER, COMMUNICATION, FIRE PROTECTION & SHUT DOWNS SHALL NOT EFFECT PORTIONS OF BUILDING(S) THAT NEED TO REMAIN IN USE. CONTRACTOR TO REROUTE OR PROVIDE TEMPORARY POWER, COMMUNICATION, FIRE PROTECTION. COORDINATE SHUT DOWNS WITH OWNER.
7. REMOVE AND REPLACE EXISTING CEILINGS, UNLESS OTHERWISE NOTED ON THE DRAWINGS. FOR PERFORMING DEMOLITION OF ALL WORK INDICATED ON THE CONSTRUCTION DRAWINGS, THE EXISTING CEILING SHALL BE REMOVED AND REPLACED IN A MANNER TO AVOID DAMAGE TO THE WALL SYSTEM.
8. NOTIFY ARCHITECT AND OWNER OF EXISTING DUCTWORK, PIPE AND CONDUIT PENETRATIONS EXPOSED AFTER DEMOLITION THAT ARE NOT FIRESTOPPED THROUGH EXISTING FLOORS AND WALLS IDENTIFIED AS FIRE AND/OR SMOKE RATED ON LIFE SAFETY PLANS. EXISTING NON-COMPLIANT PENETRATIONS ARE TO BE FIRESTOPPED.
9. WORK AREAS SHALL BE MAINTAINED AND ALL WORK AREAS SHALL BE LEFT BROOM CLEANED AT END OF EACH DAY.
10. IN ALL LOCATIONS THAT A DOOR IS ILLUSTRATED TO BE DEMOLISHED, REMOVE AND DISPOSE OF DOOR, FRAME, HARDWARE AND ALL ASSOCIATED ITEMS, UNLESS NOTED OTHERWISE.
11. ALL ITEMS SHOWN WITH A DASHED LINE ARE TO BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED.
12. TYPICAL BUILDING COMPONENTS TO BE LEFT IN PLACE WHICH ARE NOT TO BE DEMOLISHED, UNLESS NOTED OTHERWISE:
 - A. FIRE PROOFING ON COLUMNS AND BEAMS WHICH IS NOT PART OF A WALL OR CEILING SYSTEM. THIS INCLUDES PLASTER, MASONRY, AND CONCRETE COVERS WHICH MAY BE ENCAPSULATED BY THE WALL OR CEILING ASSEMBLIES.
 - B. ELECTRIC, PLUMBING AND HVAC LINES FEEDING AREAS TO REMAIN IN OPERATION. COORDINATE WITH MEP DRAWINGS.
 - C. ANY STRUCTURES UNCOVERED AS A RESULT OF DEMOLITION WHICH APPEAR TO BE SUPPORTING IN NATURE AND REQUIRING VERIFICATION PRIOR TO DEMOLITION. THIS INCLUDES EQUIPMENT SUPPORTS AND STRUCTURE ADDED AS A RESULT OF PREVIOUS CONSTRUCTION OR ADDITIONS.
13. THE OWNER WILL REMOVE ALL MOVEABLE OR UNATTACHED ITEMS TO BE SAVED OR STORED PRIOR TO CONTRACTORS' SALVAGE OPERATIONS. ITEMS TO BE SALVAGED INCLUDE BUT ARE NOT LIMITED TO, THOSE ITEMS SHOWN ON THE DRAWINGS.
14. OWNER HAS THE RIGHT TO SALVAGE ANY FIXTURES AND/OR MILLWORK WITHIN AN AREA OF DEMOLITION PRIOR TO CONTRACTOR STARTING WORK IN THAT ZONE. COORDINATE TIMING OF SUCH REMOVALS WITH OWNER.
15. RECONSTRUCT EXISTING FIREPROOFING DUE TO WALL, CEILING OR EQUIPMENT DEMOLITION.
16. **THE OWNER WILL PROVIDE THE TESTING RESULTS OF ASBESTOS CONTAINING MATERIALS (ACM) IN THE PROJECT AREA. IN THE CASE THAT ANY SUSPICIOUS MATERIALS ARE UNCOVERED OR QUESTIONED, LEAVE THE PREMISES AND NOTIFY THE OWNER & ABATEMENT CONTRACTOR FOR REQUIRED TESTING AND/OR REMOVALS.**
17. IN THE CASE THAT ANY SUSPICIOUS MATERIALS ARE UNCOVERED THAT APPEAR TO CONTAIN HAZARDOUS MATERIALS SUCH AS BUT NOT LIMITED TO MOLD, LEAD PAINT OR ASBESTOS, LEAVE THE PREMISES AND NOTIFY THE OWNER & ABATEMENT CONTRACTOR FOR REQUIRED TESTING AND/OR REMOVALS.

DEMOLITION KEY NOTES (CONTINUED)

- D15 REMOVE EXISTING DOOR, FRAME, AND HARDWARE. SALVAGE EXISTING DOOR AND DOOR HARDWARE FOR RE-USE.
- D16 REMOVE EXISTING DOOR AND DOOR HARDWARE. PREP OPENING FOR NEW WORK.
- D17 REMOVE EXISTING WOOD DOOR FRAME.
- D18 REMOVE GLAZING FROM EXISTING FRAME AND PREP FOR NEW INFILL.
- D19 REMOVE EXISTING ACT CEILING SYSTEM IN ITS ENTIRETY.
- D20 REMOVE EXISTING GYPSUM CEILING SYSTEM IN ITS ENTIRETY (ABOVE ACT)
- D21 REMOVE GYPSUM SOFFIT AND FRAMING COMPLETELY.
- D22 REMOVE EXISTING TOILET PARTITION SYSTEM COMPLETELY.
- D23 REMOVE AND SALVAGE ALL TOILET ACCESSORIES INCLUDING BUT NOT LIMITED TO GRAB BARS, MIRRORS, DISPENSORS, AND DISPOSALS FOR RE-INSTALLATION UNLESS NOTED OTHERWISE.
- D24 REMOVE AND DISPOSE OF EXISTING RECESSED SOAP DISPENSOR AND PATCH WALL TO MATCH EXISTING.
- D25 REMOVE AND DISPOSE OF EXISTING RECESSED TRASH RECEPTACLE AND PATCH WALL TO MATCH EXISTING.
- D26 REMOVE EXISTING SHELF, SUPPORTS, AND HARDWARE.
- D27 REMOVE EXISTING COILING COUNTER DOOR AND SILL IN ITS ENTIRETY.
- D28 REMOVE EXISTING LOCKER ROOM BENCH.
- D29 REMOVE EXISTING LOCKERS AND BASE.
- D30 REMOVE EXISTING METAL FOLDING GATE AND HARDWARE COMPLETELY.
- D31 MC TO REMOVE EXISTING RADIATOR AND COVER.
- D32 PC TO DISCONNECT AND REMOVE PLUMBING FIXTURES INDICATED BY DASHED LINE.
- D33 REMOVE KNEE WALL IN ITS ENTIRETY. PREP LOCATION FOR NEW WALL FINISHES.

KEY PLAN:

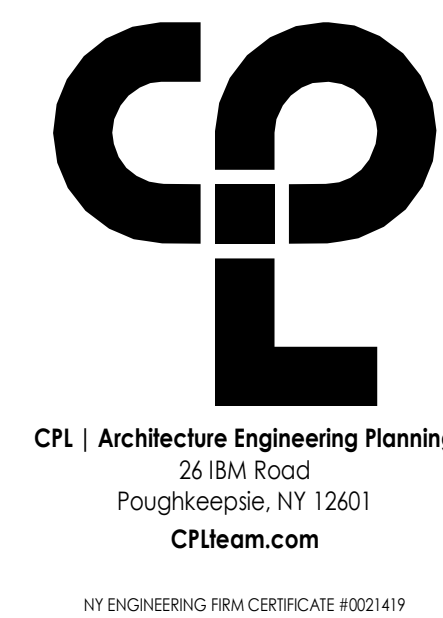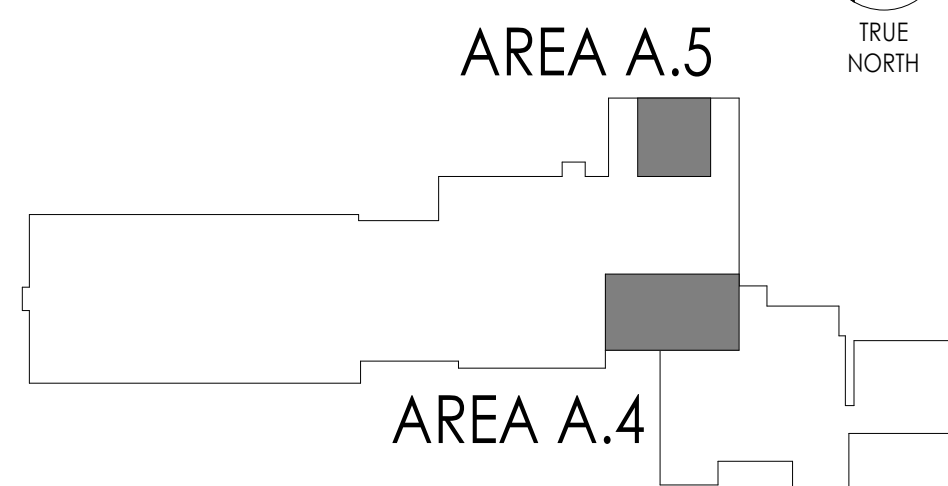

PROJECT INFORMATION

Project Number
R23.00331.00
Client Name
GREENWOOD LAKE UNION FREE DISTRICT
Project Name
2023 CAPITAL IMPROVEMENT PROJECT

District Office Address
1247 LAKES ROAD
MONROE, NEW YORK 10950

<MULTI BUILDING TITLE>

GREENWOOD LAKE ES SED NO. 44-01-11-02-0-002-016
GREENWOOD LAKE H&E SED NO. 44-01-11-02-0-001-027

Registration Expiration Dates	
Louren Tanso	09/30/26
Anthony Marchetti	03/31/27
Davie Hoff	02/28/25
Jennifer Wengender	04/30/27
Larry Weiss	12/31/24
Greg Bohner	07/31/27

PROJECT ISSUE & REVISION SCHEDULE

#	Date	Description
2	11/18/2024	BID ADDENDUM 02

PROFESSIONAL STAMPS

NEW YORK STATE EDUCATION STATUTES

IF IS A VIOLATION OF THE NEW YORK STATE EDUCATION LAW AND THE COMMISSIONERS' REGULATIONS FOR ANY PERSON, UNDER ACTING UNDER THE SUPERVISION OF A LICENSED ARCHITECT, ENGINEER OR LAND SURVEYOR, TO ACT AS AN ARCHITECT, ENGINEER OR LAND SURVEYOR, THE BOARD OF ARCHITECTS, ENGINEERS OR LAND SURVEYORS, AS THE BOARD, SHALL, UPON THE FIRST VIOLATION, AND THE SECOND VIOLATION, FOLLOWING BY THEIR SIGNATURE AND THE DATE OF SUCH VIOLATION, AND A SPECIFIC DESCRIPTION OF THE VIOLATION.

SHEET INFORMATION

Issued	Scale
10/28/2024	As indicated
Project Status	
BID SUBMISSION	
Drawn By	Checked By
RF	LR
Drawing Title	
ENLARGED DEMOLITION AND NEW WORK PLANS	

Drawing Number

ES
A202