

LinkWare Live

Official Summary

Certification Report



Exclusively For:	Prepared By:	Projects
	Systec101	Global Furniture - Denver CO -
	Murat Yildirim	
	info@systec101.com	

Product Name	Serial Number	Firmware Version	Calibration Date
DSX-8000	1927404	V6.9 Build 2	10/31/2022
DSX-8000	1927408	V6.9 Build 2	10/31/2022

Cable ID	Summary	Test Limit	Length	Headroom	Date / Time
C-1	PASS	TIA 1005 Cat 6 Channel	121 ft	3.0 dB (NEXT)	11/01/2023 11:52:26 AM
C-2	PASS	TIA 1005 Cat 6 Channel	197 ft	3.4 dB (NEXT)	11/02/2023 07:45:32 PM
C-3	PASS	TIA 1005 Cat 6 Channel	203 ft	3.9 dB (NEXT)	11/02/2023 07:47:54 PM
Intercom-1	PASS	TIA 1005 Cat 6 Channel	128 ft	1.2 dB (NEXT)	11/01/2023 12:05:14 PM
Intercom-2	PASS	TIA 1005 Cat 6 Channel	197 ft	4.8 dB (NEXT)	11/02/2023 08:04:19 PM
WAP-1	PASS	TIA 1005 Cat 6 Channel	76 ft	1.8 dB (NEXT)	11/01/2023 12:26:34 PM
WAP-2	PASS	TIA 1005 Cat 6 Channel	79 ft	2.7 dB (NEXT)	11/01/2023 12:51:18 PM

Total Length:	1001 ft
No of Reports:	7
No of Passing Reports:	7
No of Failing Reports:	0
No of Warning Reports:	0
Documentation only:	0



Cable ID: C-1

Date / Time: 11/01/2023 11:52:26 AM Operator: MURAT
 Headroom: 3 dB (NEXT) Software Version: V6.9 Build 2
 Test Limit: TIA 1005 Cat 6 Channel Calibration Date:
 Cable Type: Cat 6 U/UTP Main (Module): 10/31/2022
 NVP: 69.0% Remote (Module): 10/31/2022
 Project: Global Furniture - Denver CO -

Test Summary: PASS

Length (ft), Limit 328	[Pair 3,6]	121
Prop. Delay (ns), Limit 555	[Pair 7,8]	189
Delay Skew (ns), Limit 50	[Pair 7,8]	11
Resistance (ohms)	[Pair 3,6]	11.4
Insertion Loss Margin (dB)	[Pair 3,6]	22.8
Frequency (MHz)	[Pair 3,6]	250.0
Limit (dB)	[Pair 3,6]	35.9

Worst Case Margin Worst Case Value

PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6-7,8	3,6-7,8	3,6-4,5	3,6-7,8
NEXT (dB)	3.5	3.0	4.5	5.4
Freq. (MHz)	69.0	69.5	240.5	246.5
Limit (dB)	42.7	42.6	33.4	33.2
Worst Pair	3,6	3,6	3,6	3,6
PS NEXT (dB)	4.0	4.7	4.4	6.3
Freq. (MHz)	92.3	5.5	241.0	215.0
Limit (dB)	37.7	58.3	30.4	31.3


PASS	MAIN	SR	MAIN	SR
Worst Pair	4,5-3,6	4,5-3,6	4,5-3,6	4,5-3,6
ACR-F (dB)	8.8	9.1	9.0	9.1
Freq. (MHz)	218.5	240.0	242.5	240.0
Limit (dB)	16.5	15.7	15.6	15.7
Worst Pair	3,6	3,6	3,6	3,6
PS ACR-F (dB)	11.5	11.9	11.9	12.0
Freq. (MHz)	218.5	194.5	242.5	240.0
Limit (dB)	13.5	14.5	12.6	12.7

N/A	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	3,6-4,5	3,6-4,5	3,6-7,8
ACR-N (dB)	7.4	7.6	27.3	28.7
Freq. (MHz)	5.5	5.5	240.5	246.5
Limit (dB)	56.1	56.1	-1.7	-2.4
Worst Pair	3,6	3,6	3,6	3,6
PS ACR-N (dB)	7.2	7.5	26.6	30.7
Freq. (MHz)	5.5	5.5	241.0	246.5
Limit (dB)	53.6	53.6	-4.7	-5.4






PASS	MAIN	SR	MAIN	SR
Worst Pair	7,8	7,8	7,8	4,5
RL (dB)	5.0	7.3	10.5	12.7
Freq. (MHz)	43.5	38.0	223.5	224.0
Limit (dB)	15.6	16.1	8.5	8.5

Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	2.5GBASE-T	5GBASE-T
ATM-25	ATM-51	ATM-155
100VG-AnyLan	TR-4	TR-16 Active
TR-16 Passive		



PASS

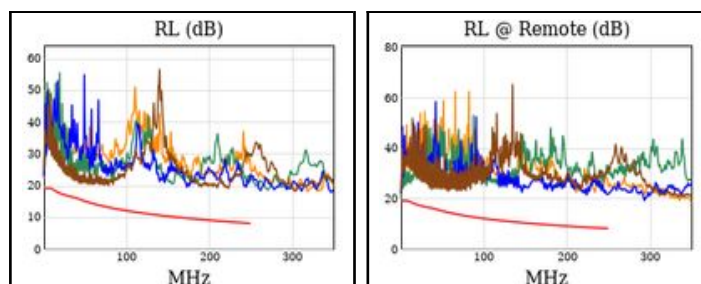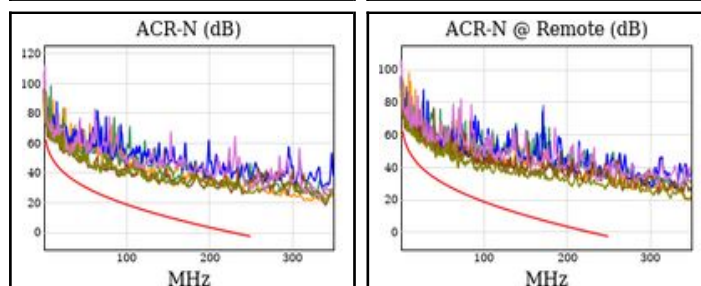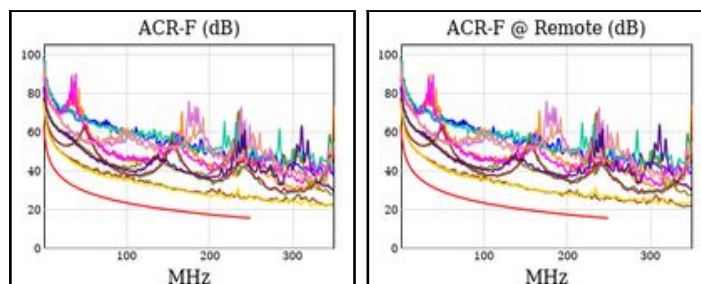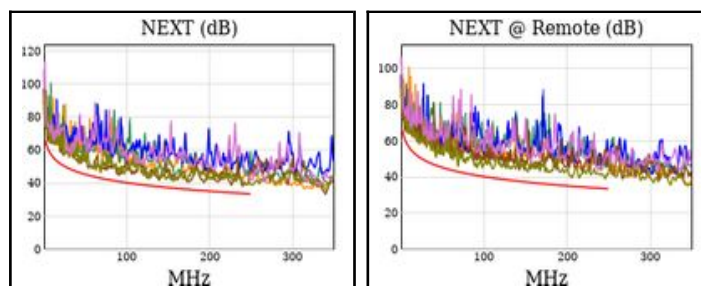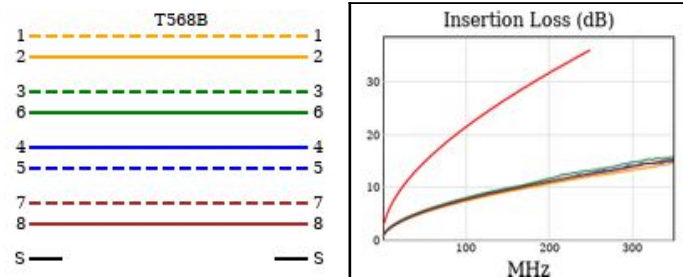



Cable ID: C-2

Date / Time: 11/02/2023 07:45:32 PM Operator: MURAT
 Headroom: 3.4 dB (NEXT) Software Version: V6.9 Build 2
 Test Limit: TIA 1005 Cat 6 Channel Calibration Date:
 Cable Type: Cat 6 U/UTP Main (Module): 10/31/2022
 NVP: 69.0% Remote (Module): 10/31/2022
 Project: Global Furniture - Denver CO -

Test Summary: PASS

Length (ft), Limit 328	[Pair 7,8]	197
Prop. Delay (ns), Limit 555	[Pair 4,5]	303
Delay Skew (ns), Limit 50	[Pair 4,5]	13
Resistance (ohms)	[Pair 7,8]	10.8
Insertion Loss Margin (dB)	[Pair 4,5]	18.1
Frequency (MHz)	[Pair 4,5]	250.0
Limit (dB)	[Pair 4,5]	35.9

Worst Case Margin Worst Case Value

PASS	MAIN	SR	MAIN	SR
Worst Pair	1,2-3,6	3,6-7,8	1,2-3,6	3,6-7,8
NEXT (dB)	4.9	3.4	5.4	5.1
Freq. (MHz)	195.5	86.0	249.5	243.0
Limit (dB)	35.0	41.0	33.1	33.3
Worst Pair	3,6	3,6	1,2	3,6
PS NEXT (dB)	5.8	3.9	6.0	5.7
Freq. (MHz)	3.4	86.3	237.0	243.0
Limit (dB)	61.7	38.2	30.6	30.4


PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	4,5-3,6	3,6-4,5	4,5-3,6
ACR-F (dB)	10.5	11.0	10.5	11.0
Freq. (MHz)	250.0	250.0	250.0	250.0
Limit (dB)	15.3	15.3	15.3	15.3
Worst Pair	4,5	3,6	4,5	3,6
PS ACR-F (dB)	13.4	13.1	13.4	13.1
Freq. (MHz)	250.0	250.0	250.0	250.0
Limit (dB)	12.3	12.3	12.3	12.3

N/A	MAIN	SR	MAIN	SR
Worst Pair	1,2-3,6	1,2-3,6	1,2-3,6	3,6-7,8
ACR-N (dB)	6.9	6.2	24.0	23.5
Freq. (MHz)	3.5	3.5	249.5	243.5
Limit (dB)	60.2	60.2	-2.8	-2.1
Worst Pair	3,6	3,6	1,2	3,6
PS ACR-N (dB)	7.6	6.6	25.6	24.0
Freq. (MHz)	3.4	3.4	249.5	243.0
Limit (dB)	58.0	58.0	-5.7	-5.0






PASS	MAIN	SR	MAIN	SR
Worst Pair	7,8	3,6	4,5	4,5
RL (dB)	9.0	9.0	10.2	10.6
Freq. (MHz)	48.8	9.0	200.0	246.5
Limit (dB)	15.1	19.0	9.0	8.1

Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	2.5GBASE-T	5GBASE-T
ATM-25	ATM-51	ATM-155
100VG-AnyLan	TR-4	TR-16 Active
TR-16 Passive		



PASS

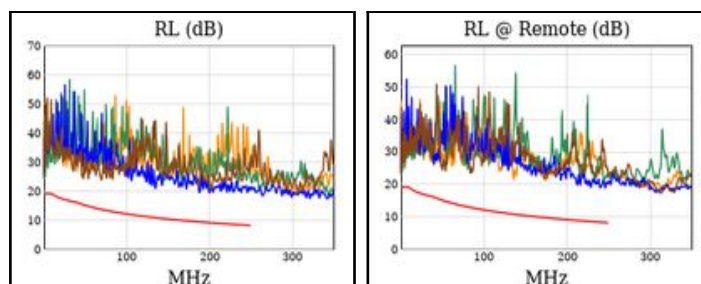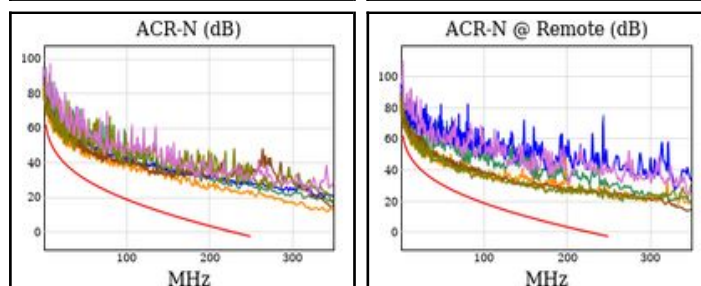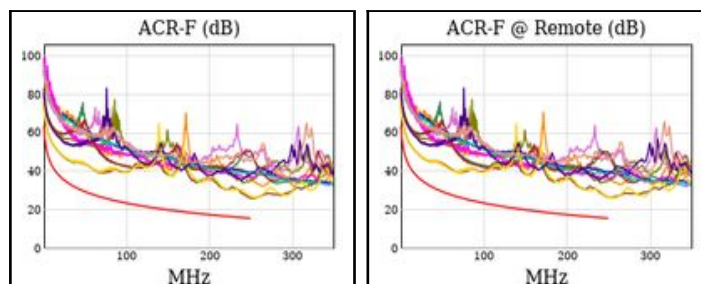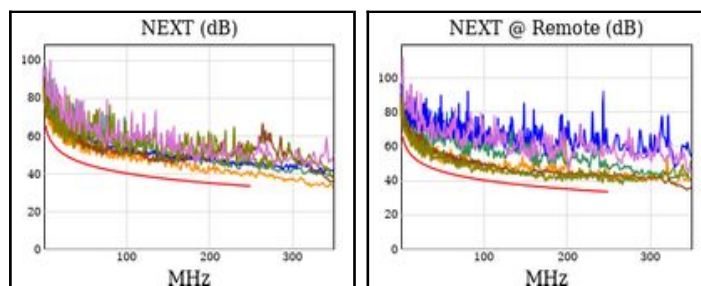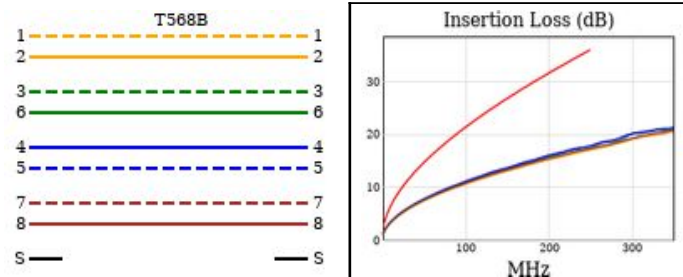




Cable ID: C-3


Date / Time: 11/02/2023 07:47:54 PM Operator: MURAT
 Headroom: 3.9 dB (NEXT) Software Version: V6.9 Build 2
 Test Limit: TIA 1005 Cat 6 Channel Calibration Date:
 Cable Type: Cat 6 U/UTP Main (Module): 10/31/2022
 NVP: 69.0% Remote (Module): 10/31/2022
 Project: Global Furniture - Denver CO -

Test Summary: PASS

Length (ft), Limit 328	[Pair 7,8]	203
Prop. Delay (ns), Limit 555	[Pair 4,5]	312
Delay Skew (ns), Limit 50	[Pair 4,5]	13
Resistance (ohms)	[Pair 7,8]	13.9
Insertion Loss Margin (dB)	[Pair 4,5]	17.7
Frequency (MHz)	[Pair 4,5]	250.0
Limit (dB)	[Pair 4,5]	35.9



PASS

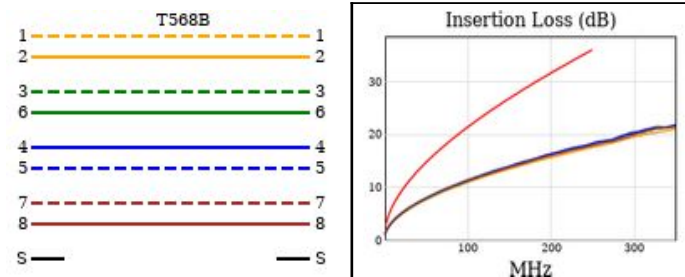

Worst Case Margin Worst Case Value

PASS	MAIN	SR	MAIN	SR
Worst Pair	1,2-3,6	3,6-4,5	1,2-3,6	3,6-4,5
NEXT (dB)	5.1	3.9	5.1	5.3
Freq. (MHz)	223.5	68.8	223.5	184.5
Limit (dB)	34.0	42.7	34.0	35.4
Worst Pair	3,6	3,6	3,6	3,6
PS NEXT (dB)	6.0	5.6	6.2	7.2
Freq. (MHz)	4.8	4.8	233.0	235.0
Limit (dB)	59.3	59.3	30.7	30.6





PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	3,6-4,5	3,6-4,5	3,6-4,5
ACR-F (dB)	10.3	10.2	10.3	10.3
Freq. (MHz)	245.5	248.5	245.5	249.0
Limit (dB)	15.5	15.4	15.5	15.3
Worst Pair	3,6	4,5	3,6	4,5
PS ACR-F (dB)	13.0	13.2	13.1	13.3
Freq. (MHz)	248.5	248.5	249.5	249.0
Limit (dB)	12.4	12.4	12.3	12.3

N/A	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	3,6-4,5	1,2-3,6	3,6-4,5
ACR-N (dB)	8.2	7.3	24.0	26.6
Freq. (MHz)	3.1	3.1	250.0	250.0
Limit (dB)	61.2	61.2	-2.8	-2.8
Worst Pair	3,6	3,6	3,6	3,6
PS ACR-N (dB)	8.1	7.7	24.8	24.4
Freq. (MHz)	4.8	4.8	245.5	235.0
Limit (dB)	54.9	54.9	-5.3	-4.0

PASS	MAIN	SR	MAIN	SR
Worst Pair	7,8	7,8	4,5	7,8
RL (dB)	9.3	6.8	11.7	7.5
Freq. (MHz)	81.5	7.4	241.5	69.5
Limit (dB)	12.9	19.0	8.2	13.6

Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	2.5GBASE-T	5GBASE-T
ATM-25	ATM-51	ATM-155
100VG-AnyLan	TR-4	TR-16 Active
TR-16 Passive		

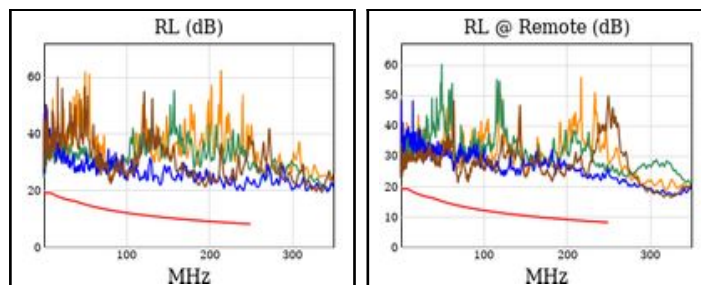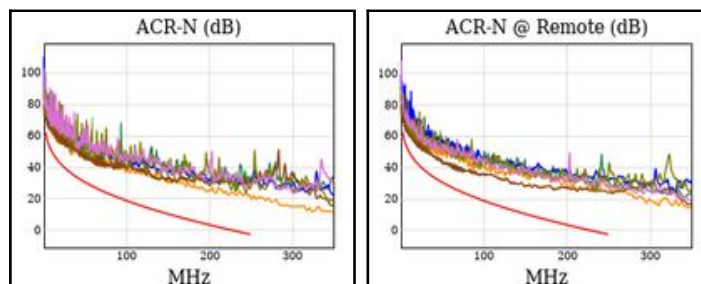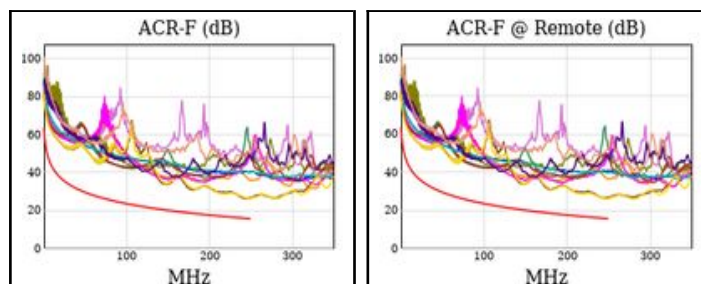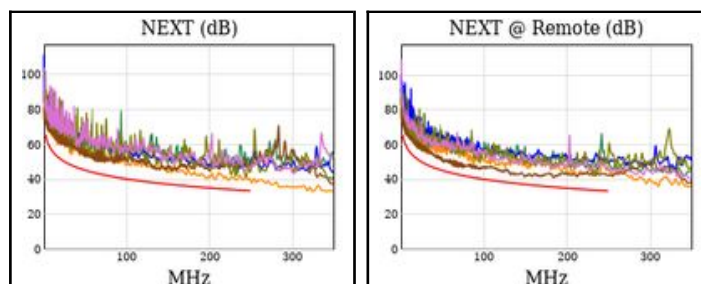



Cable ID: Intercom-1

Date / Time: 11/01/2023 12:05:14 PM Operator: MURAT
 Headroom: 1.2 dB (NEXT) Software Version: V6.9 Build 2
 Test Limit: TIA 1005 Cat 6 Channel Calibration Date:
 Cable Type: Cat 6 U/UTP Main (Module): 10/31/2022
 NVP: 69.0% Remote (Module): 10/31/2022
 Project: Global Furniture - Denver CO -

Test Summary: PASS

Length (ft), Limit 328	[Pair 3,6]	128
Prop. Delay (ns), Limit 555	[Pair 7,8]	201
Delay Skew (ns), Limit 50	[Pair 7,8]	12
Resistance (ohms)	[Pair 7,8]	10.6
Insertion Loss Margin (dB)	[Pair 3,6]	22.0
Frequency (MHz)	[Pair 3,6]	250.0
Limit (dB)	[Pair 3,6]	35.9

Worst Case Margin Worst Case Value

PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6-7,8	1,2-7,8	3,6-7,8	1,2-7,8
NEXT (dB)	1.2	6.0	2.7	6.3
Freq. (MHz)	74.3	23.5	237.5	246.5
Limit (dB)	42.1	50.5	33.5	33.2
Worst Pair	3,6	7,8	3,6	7,8
PS NEXT (dB)	2.5	6.1	2.9	6.6
Freq. (MHz)	131.5	31.0	250.0	246.5
Limit (dB)	35.0	45.8	30.2	30.3


PASS	MAIN	SR	MAIN	SR
Worst Pair	4,5-3,6	4,5-3,6	3,6-4,5	4,5-3,6
ACR-F (dB)	9.2	8.7	9.3	8.7
Freq. (MHz)	234.0	250.0	250.0	250.0
Limit (dB)	15.9	15.3	15.3	15.3
Worst Pair	3,6	3,6	3,6	3,6
PS ACR-F (dB)	11.5	11.2	11.9	11.2
Freq. (MHz)	234.0	250.0	250.0	250.0
Limit (dB)	12.9	12.3	12.3	12.3

N/A	MAIN	SR	MAIN	SR
Worst Pair	3,6-7,8	3,6-4,5	3,6-7,8	1,2-7,8
ACR-N (dB)	8.2	10.1	24.5	28.6
Freq. (MHz)	9.5	2.6	237.5	246.5
Limit (dB)	50.8	61.7	-1.4	-2.4
Worst Pair	3,6	3,6	3,6	7,8
PS ACR-N (dB)	7.5	9.1	25.0	29.0
Freq. (MHz)	5.0	5.4	250.0	246.5
Limit (dB)	54.5	53.8	-5.8	-5.4










PASS	MAIN	SR	MAIN	SR
Worst Pair	7,8	7,8	4,5	4,5
RL (dB)	7.9	7.9	8.1	11.5
Freq. (MHz)	41.0	41.0	234.0	224.5
Limit (dB)	15.9	15.9	8.3	8.5

Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	2.5GBASE-T	5GBASE-T
ATM-25	ATM-51	ATM-155
100VG-AnyLan	TR-4	TR-16 Active
TR-16 Passive		



PASS

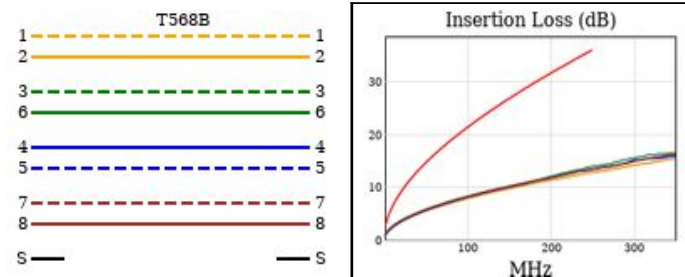




Cable ID: Intercom-2


Date / Time: 11/02/2023 08:04:19 PM Operator: MURAT
 Headroom: 4.8 dB (NEXT) Software Version: V6.9 Build 2
 Test Limit: TIA 1005 Cat 6 Channel Calibration Date:
 Cable Type: Cat 6 U/UTP Main (Module): 10/31/2022
 NVP: 69.0% Remote (Module): 10/31/2022
 Project: Global Furniture - Denver CO -

Test Summary: PASS

Length (ft), Limit 328	[Pair 7,8]	197
Prop. Delay (ns), Limit 555	[Pair 4,5]	302
Delay Skew (ns), Limit 50	[Pair 4,5]	12
Resistance (ohms)	[Pair 3,6]	9.3
Insertion Loss Margin (dB)	[Pair 4,5]	18.2
Frequency (MHz)	[Pair 4,5]	250.0
Limit (dB)	[Pair 4,5]	35.9



PASS

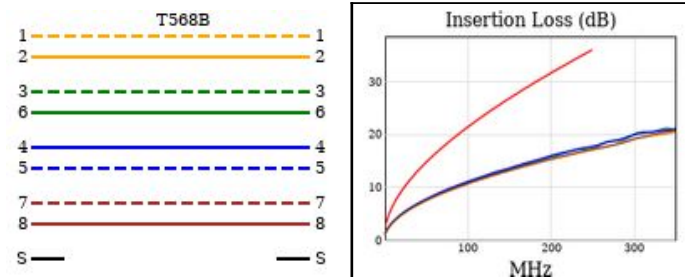

Worst Case Margin Worst Case Value

PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	3,6-4,5	1,2-3,6	1,2-3,6
NEXT (dB)	5.1	4.8	5.2	5.2
Freq. (MHz)	3.1	140.5	243.0	250.0
Limit (dB)	64.8	37.4	33.3	33.1
Worst Pair	3,6	3,6	3,6	3,6
PS NEXT (dB)	5.0	5.4	6.5	6.1
Freq. (MHz)	156.0	223.5	250.0	250.0
Limit (dB)	33.7	31.0	30.2	30.2


PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	4,5-3,6	3,6-4,5	4,5-3,6
ACR-F (dB)	10.0	10.4	10.0	10.4
Freq. (MHz)	250.0	250.0	250.0	250.0
Limit (dB)	15.3	15.3	15.3	15.3
Worst Pair	4,5	3,6	4,5	3,6
PS ACR-F (dB)	12.6	12.2	12.6	12.2
Freq. (MHz)	250.0	250.0	250.0	250.0
Limit (dB)	12.3	12.3	12.3	12.3

N/A	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	3,6-4,5	1,2-3,6	1,2-3,6
ACR-N (dB)	6.9	6.6	23.4	23.8
Freq. (MHz)	3.1	3.3	243.0	250.0
Limit (dB)	61.2	60.9	-2.0	-2.8
Worst Pair	3,6	3,6	3,6	3,6
PS ACR-N (dB)	7.8	7.4	25.2	24.8
Freq. (MHz)	3.3	3.3	250.0	250.0
Limit (dB)	58.4	58.4	-5.8	-5.8

PASS	MAIN	SR	MAIN	SR
Worst Pair	4,5	3,6	4,5	4,5
RL (dB)	10.6	10.8	10.8	10.8
Freq. (MHz)	212.5	12.8	224.0	240.0
Limit (dB)	8.7	18.5	8.5	8.2

Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	2.5GBASE-T	5GBASE-T
ATM-25	ATM-51	ATM-155
100VG-AnyLan	TR-4	TR-16 Active
TR-16 Passive		

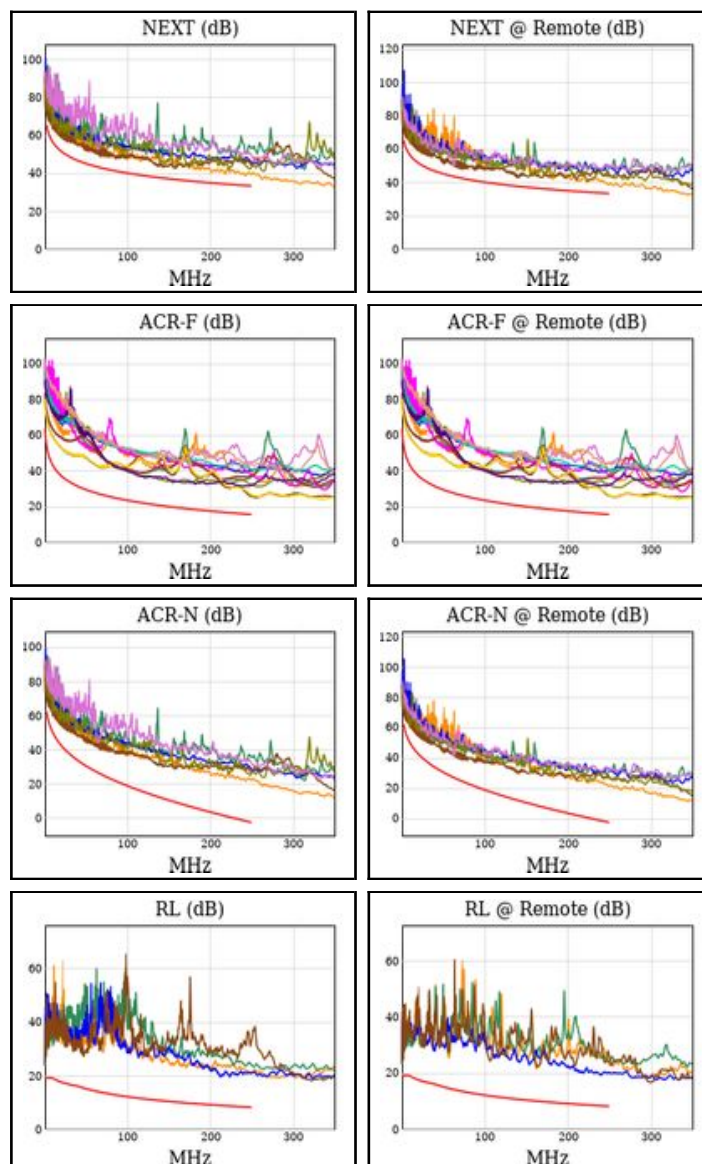



Cable ID: WAP-1

Date / Time: 11/01/2023 12:26:34 PM Operator: MURAT
 Headroom: 1.8 dB (NEXT) Software Version: V6.9 Build 2
 Test Limit: TIA 1005 Cat 6 Channel Calibration Date:
 Cable Type: Cat 6 U/UTP Main (Module): 10/31/2022
 NVP: 69.0% Remote (Module): 10/31/2022
 Project: Global Furniture - Denver CO -

Test Summary: PASS

Length (ft), Limit 328	[Pair 3,6]	76
Prop. Delay (ns), Limit 555	[Pair 7,8]	118
Delay Skew (ns), Limit 50	[Pair 7,8]	6
Resistance (ohms)	[Pair 7,8]	7.3
Insertion Loss Margin (dB)	[Pair 3,6]	27.7
Frequency (MHz)	[Pair 3,6]	250.0
Limit (dB)	[Pair 3,6]	35.9

Worst Case Margin Worst Case Value

PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	3,6-7,8	3,6-4,5	3,6-4,5
NEXT (dB)	1.8	3.8	2.0	6.0
Freq. (MHz)	164.0	19.1	244.5	245.5
Limit (dB)	36.3	52.0	33.3	33.3
Worst Pair	3,6	3,6	3,6	3,6
PS NEXT (dB)	1.5	4.0	1.5	5.5
Freq. (MHz)	244.5	19.1	244.5	201.5
Limit (dB)	30.3	49.3	30.3	31.8


PASS	MAIN	SR	MAIN	SR
Worst Pair	4,5-3,6	3,6-4,5	4,5-3,6	4,5-3,6
ACR-F (dB)	8.3	8.7	8.9	8.9
Freq. (MHz)	211.5	211.5	239.5	246.5
Limit (dB)	16.8	16.8	15.7	15.4
Worst Pair	3,6	4,5	3,6	3,6
PS ACR-F (dB)	11.0	11.3	11.7	11.6
Freq. (MHz)	211.5	211.5	239.5	247.5
Limit (dB)	13.8	13.8	12.7	12.4

N/A	MAIN	SR	MAIN	SR
Worst Pair	3,6-7,8	3,6-4,5	3,6-4,5	3,6-4,5
ACR-N (dB)	8.6	8.6	29.7	33.8
Freq. (MHz)	19.4	4.5	244.5	245.5
Limit (dB)	43.0	58.0	-2.2	-2.3
Worst Pair	3,6	3,6	3,6	3,6
PS ACR-N (dB)	8.6	8.8	28.8	33.4
Freq. (MHz)	4.4	4.4	244.5	235.0
Limit (dB)	55.7	55.7	-5.2	-4.0






PASS	MAIN	SR	MAIN	SR
Worst Pair	7,8	4,5	4,5	4,5
RL (dB)	5.8	5.2	9.1	5.2
Freq. (MHz)	43.0	123.0	177.5	123.0
Limit (dB)	15.7	11.1	9.5	11.1

Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	2.5GBASE-T	5GBASE-T
ATM-25	ATM-51	ATM-155
100VG-AnyLan	TR-4	TR-16 Active
TR-16 Passive		



PASS

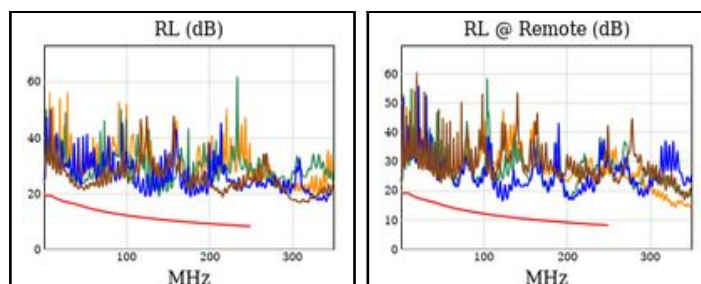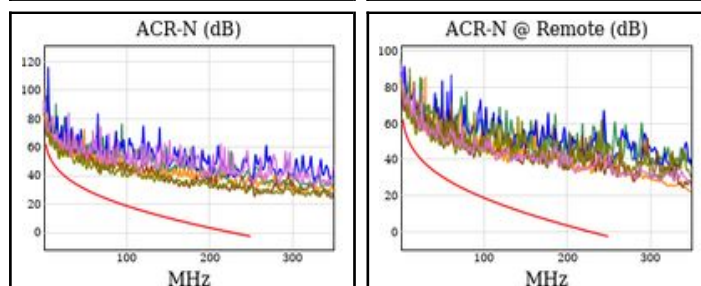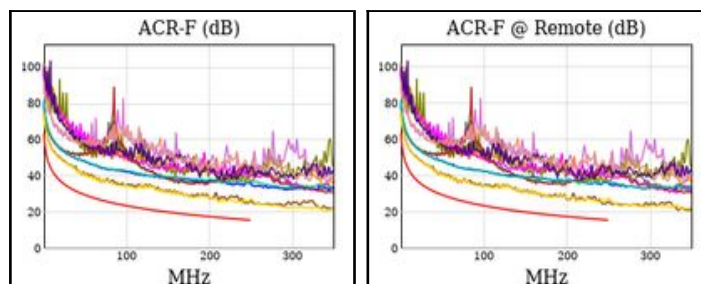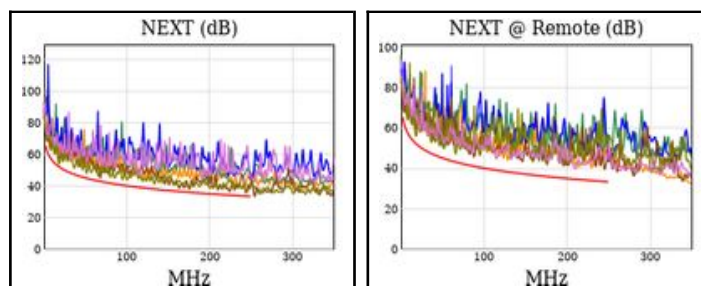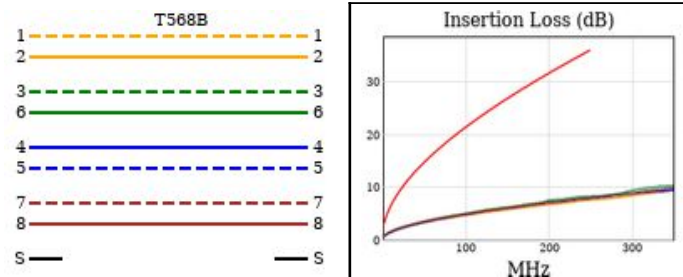



Cable ID: WAP-2

Date / Time: 11/01/2023 12:51:18 PM Operator: MURAT
 Headroom: 2.7 dB (NEXT) Software Version: V6.9 Build 2
 Test Limit: TIA 1005 Cat 6 Channel Calibration Date:
 Cable Type: Cat 6 U/UTP Main (Module): 10/31/2022
 NVP: 69.0% Remote (Module): 10/31/2022
 Project: Global Furniture - Denver CO -

Test Summary: PASS

Length (ft), Limit 328	[Pair 3,6]	79
Prop. Delay (ns), Limit 555	[Pair 1,2]	123
Delay Skew (ns), Limit 50	[Pair 1,2]	6
Resistance (ohms)	[Pair 7,8]	24.2
Insertion Loss Margin (dB)	[Pair 7,8]	27.0
Frequency (MHz)	[Pair 7,8]	250.0
Limit (dB)	[Pair 7,8]	35.9

Worst Case Margin Worst Case Value

PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	3,6-4,5	3,6-7,8	4,5-7,8
NEXT (dB)	2.7	4.7	3.5	7.0
Freq. (MHz)	70.8	66.0	247.0	236.5
Limit (dB)	42.5	43.0	33.2	33.5
Worst Pair	3,6	3,6	3,6	7,8
PS NEXT (dB)	3.3	5.0	3.3	6.5
Freq. (MHz)	242.0	61.3	242.0	237.0
Limit (dB)	30.4	40.7	30.4	30.6


PASS	MAIN	SR	MAIN	SR
Worst Pair	4,5-3,6	3,6-4,5	4,5-3,6	3,6-4,5
ACR-F (dB)	10.2	10.5	11.3	11.7
Freq. (MHz)	191.5	191.5	232.0	232.0
Limit (dB)	17.6	17.6	15.9	15.9
Worst Pair	3,6	4,5	3,6	3,6
PS ACR-F (dB)	12.7	12.4	13.9	14.2
Freq. (MHz)	61.5	1.0	232.0	246.5
Limit (dB)	24.5	60.3	12.9	12.4

N/A	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	1,2-3,6	3,6-7,8	4,5-7,8
ACR-N (dB)	10.2	10.7	30.3	33.1
Freq. (MHz)	4.4	4.1	247.0	236.5
Limit (dB)	58.2	58.7	-2.5	-1.3
Worst Pair	3,6	3,6	3,6	7,8
PS ACR-N (dB)	9.9	9.2	30.2	32.7
Freq. (MHz)	4.4	4.1	242.0	237.0
Limit (dB)	55.7	56.2	-4.9	-4.3

PASS	MAIN	SR	MAIN	SR
Worst Pair	7,8	7,8	4,5	7,8
RL (dB)	5.3	1.2	7.6	7.6
Freq. (MHz)	23.8	47.0	179.0	207.0
Limit (dB)	17.1	15.3	9.5	8.8

Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	2.5GBASE-T	5GBASE-T
ATM-25	ATM-51	ATM-155
100VG-AnyLan	TR-4	TR-16 Active
TR-16 Passive		



PASS

