


Undoing daisy-chaining on POC registers

When a register and a pinpad are on the same port, the setup will **initially look like this**:

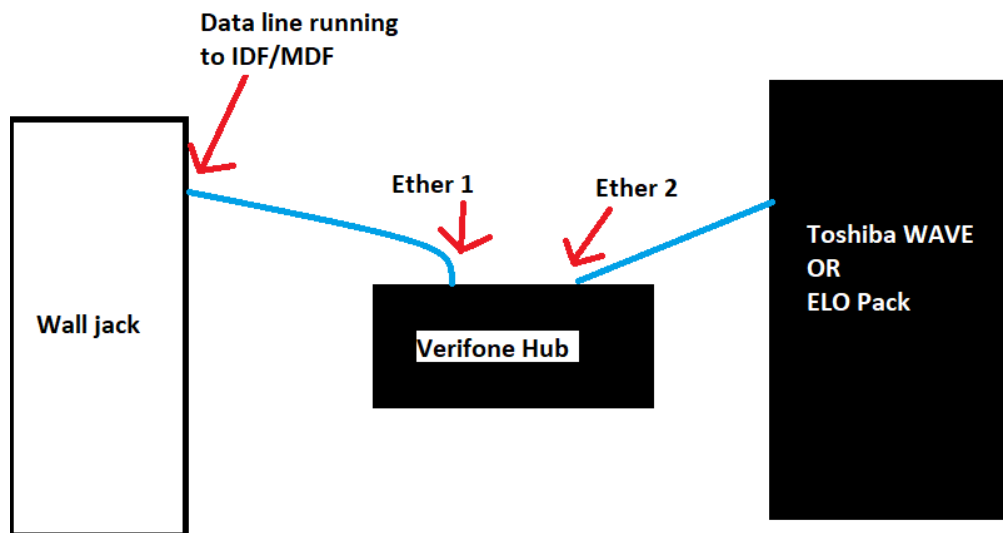

To connect the register and pinpad to separate ports:

1. Unplug the Ether 2 connection (going to the register WAVE or ELO) on the Verifone hub;
2. Plug it in to another open port on the data jack;
3. Confirm network connection by running test transaction on register or checking with Kohl's support

Afterwards, the network connections should look like this:

